


1. turn off the radio, plug programming cable.
2. Press and hold the side key 1 and the side key 2 to turn on the radio. The radio will be in upgrade mode when the indicator light is on.



3. Open the upgrade software "Update.exe"



Config.ini	2016/8/18 15:09
hid.dll	2008/4/13 11:13
mfc90.dll	2007/11/7 17:19
msvcr90.dll	2017/1/3 13:57
setupapi.dll	2008/4/15 4:00
STDFU.dll	2011/5/8 15:58
STTubeDevice30.dll	2011/5/8 15:58
Update.exe	2017/8/29 9:42

4. Click "Browse" to select the file to be upgraded, for example: GD-77_V2.2.1.sgl,

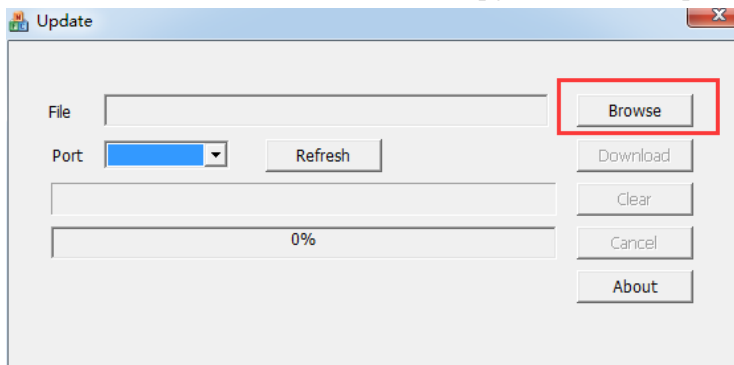

Eng v103_170830	2017/9/26 11:59
GD-77_V2.6.6.sgl	2017/9/19 9:41
update operation 2017.9.26.docx	2017/9/26 10:08
vcredist_x86_2008.exe	2013/11/11 15:08



5. Click "Download" to complete the upgrade.

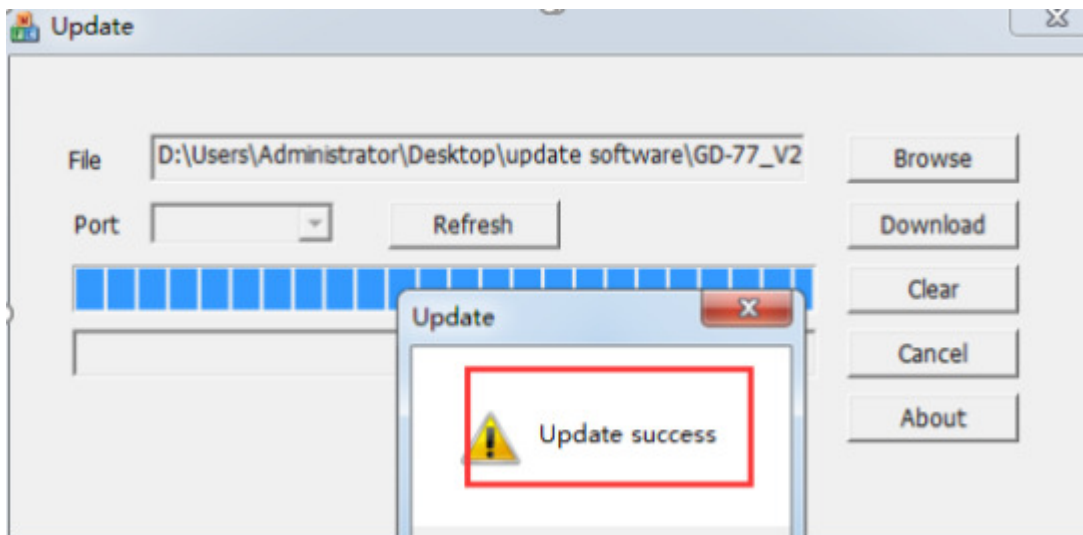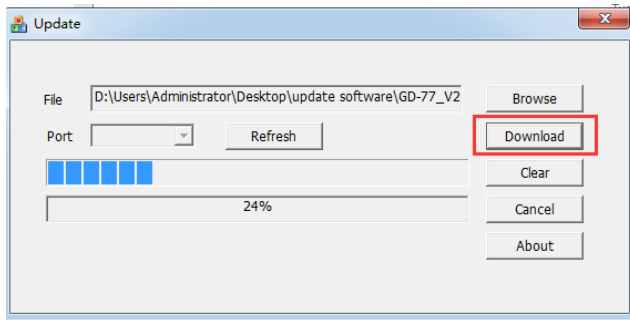

6. Unplug programming cable, turn off radio or reboot

V2.6.6 update content:

1: 2.5K step

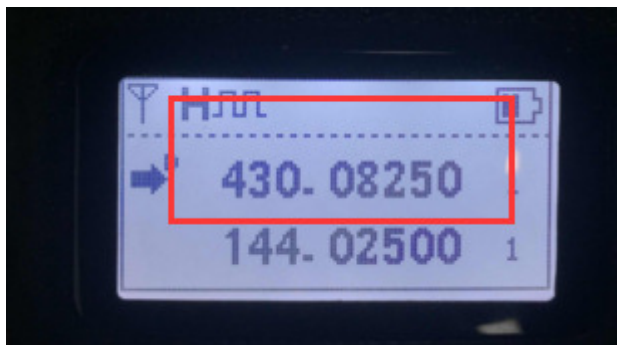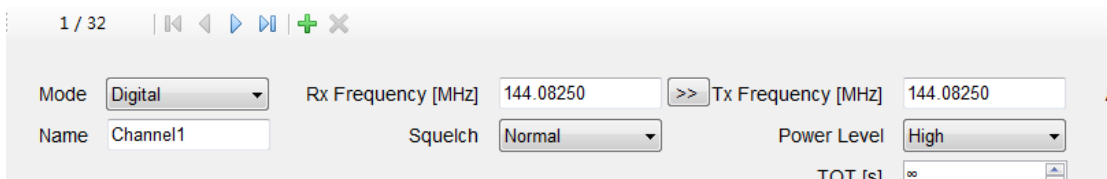


2: The backlight can be turned off:




V2.6.3 update content:

ADD TX Exit Tone :

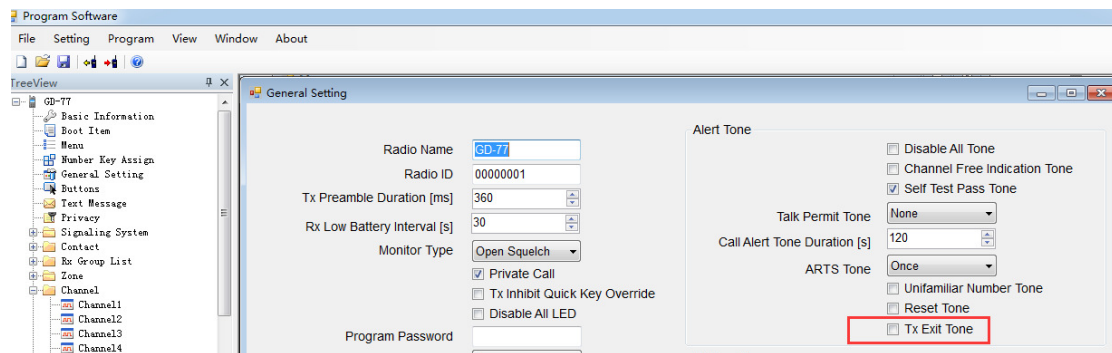

V2.6.1 update content:

1: Promiscuous mode: CC (Colour Code) and TS (TimeSlot) to the same, TG (TalkGroup) 、Private Call ID can be different.
Promiscuous mode Switch:

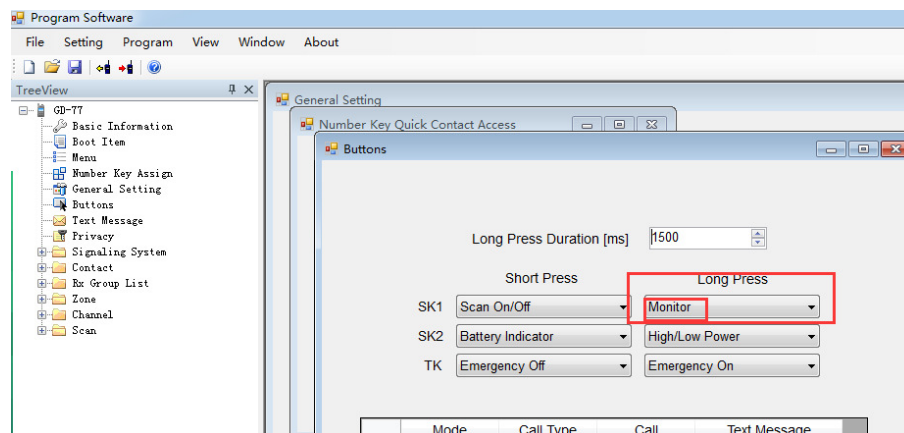

2:1750 Europe : 1750 Switch:



Analogue channel, Hold down "PTT"+Left direction button.